

# 加强型亚克力泡棉胶带


## REINFORCED ACRYLIC FOAM TAPE

### 性能特点 Features

- ▶ 这是一类强粘型亚克力泡棉胶带，采用二次涂胶工艺制成，具有更强的初始粘接力以及耐温性能。
- ▶ 超高的粘着性，在高低温环境下有良好的粘合力，减少处理剂的使用具有防水、防振动、耐热、隔音性能。
- ▶ This is a type of strong adhesive acrylic foam tape made using a secondary coating process, which has stronger initial adhesion and temperature resistance.
- ▶ Ultra high adhesion, good adhesion in high and low temperature environments, reducing the use of primer Has waterproof, vibration resistant, heat resistant, and sound insulation properties

### 推荐应用 Application recommend

- ▶ 户外材料的安装固定。
- ▶ 汽车防擦条，保险杠防撞板，铭牌标牌踏板粘贴，电梯墙板的固定安装。
- ▶ 装饰条，导水条，密封条，车内嵌板，电器外壳，结构板顶板的粘贴。
- ▶ 适合玻玻与ABS、PP的粘合，（比如微波炉、冰箱等面板粘贴）。
- ▶ Bonding and fixing of outdoor materials.
- ▶ Auto anti friction strips, bumper anti-collision plates, nameplate and plaque pedal pasting, and fixed installation of elevator wall panels.
- ▶ Fixing of decorative strips, water guide strips, sealing strips, car interior panels, electrical enclosures, and structural panel top plates.
- ▶ Suitable for the adhesion of glass to ABS, PP, (such as microwave ovens, refrigerators and other panels paste)

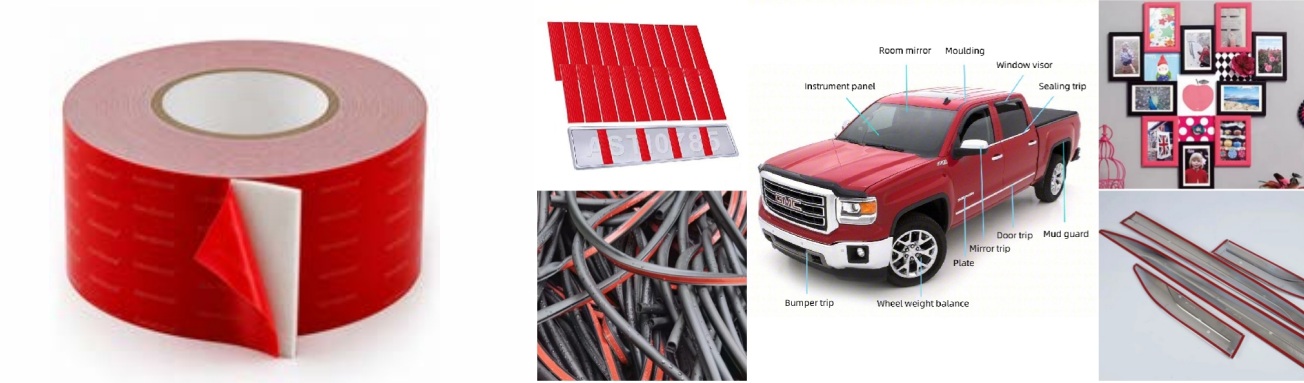

### 产品结构 Product Structure



| 型号<br>Item       | 厚度<br>Thicknss<br>(mm) | 颜色<br>Color                 | 180°剥离力<br>180°Peeling force<br>(N/in) | 耐温<br>Tem.resistance(°C) | 规格<br>Size  |
|------------------|------------------------|-----------------------------|----------------------------------------|--------------------------|-------------|
| 6040GBH/WH/GH    | 0.40                   | 黑Black、白White、灰Gray         | 33                                     | -20~120                  | 800mm*33m   |
| 6050CH/WH/GH     | 0.50                   | 透明Clear、白White、灰Gray        | 34                                     | -20~120                  | 800mm*33m   |
| 6064GBH/WH/GH    | 0.64                   | 黑Black、白White、灰Gray         | 35                                     | -20~120                  | 800mm*33m   |
| 6080GBH/WH/GH    | 0.80                   | 黑Black、白White、灰Gray         | 45                                     | -20~120                  | 800mm*33m   |
| 6110CH/GBH/WH/GH | 1.1                    | 透明Clear、黑Black、白White、灰Gray | 48                                     | -20~120                  | 800mm*33m   |
| 6120GBH          | 1.2                    | 黑Black                      | 45                                     | -20~120                  | 800mm*33m   |
| 6150GBH          | 1.5                    | 黑Black                      | 45                                     | -20~120                  | 800mm*16.5m |
| 6200GBH/WH/GH    | 2.0                    | 黑Black、白White、灰Gray         | 46                                     | -20~120                  | 800mm*16.5m |

注：本资料所有数据均在奥米科标准条件下测试所得。所有数据并非保证值，仅供参考。1、胶带厚度中不包括剥离层的厚度。2、可以根据客户的要求个案生产。3、要到达最佳的粘接效果，粘接表面必须是洁净、干燥的，胶带应用的最佳温度范围是21-38℃，建议若初始粘接温度低于10℃时，不适宜粘接，因此时的胶粘剂可能会变硬，而无法牢固粘接在物体上；但是，如果已经粘接上了，低温下的持粘力同样是令人满意的。

Note: The data sheet is obtained under the AMK lab standard test for reference. 1.The thickness excludes the released liner thickness. 2.Manufacturing can be customized. 3.Before laminating, all foreign materials such as dirt, water and oil should be cleaned and dried. Or you may get unexpected results different from this data sheet. To obtain optimum adhesion, the bonding surfaces must be clean, dry and well unified. Some typical surface cleaning solvents are isopropyl alcohol or heptane.\* Ideal tape application temperature range is 21°C to 38°C. Initial tape application to surfaces at temperatures below 10°C is not recommended because the adhesive becomes too firm to adhere readily. However, once properly applied, low temperature holding is generally satisfactory.