

防水泡棉胶带


WATERPROOF FOAM TAPE

性能特点 Features


- ▶ 优异的抗跌落、缓冲性，采用高强度闭孔泡棉设计，通过泡棉的应力缓和达到冲击吸收效果，重工性优；
- ▶ 密封性和防水性优，能防止灰尘和水汽进入，耐候性、耐溶剂性优。
- ▶ Excellent anti-drop, cushioning, used high-strength closed-cell foam design, impact absorption effect,excellent overhauling;
- ▶ Has excellent sealing and water resistance, prevent dust and water vapor from entering, has excellent weather resistance and solvent resistance.

推荐应用 Application recommend

- ▶ 手机框体、车载显示屏框体粘接固定；
- ▶ 电子产品零部件边框粘接，具有优良的密封性和防水性能。
- ▶ Suitable for bonding and fixing of mobile phone frame and car display frame;
- ▶ The frame bonding of electronic product parts with excellent sealing and waterproof performance.

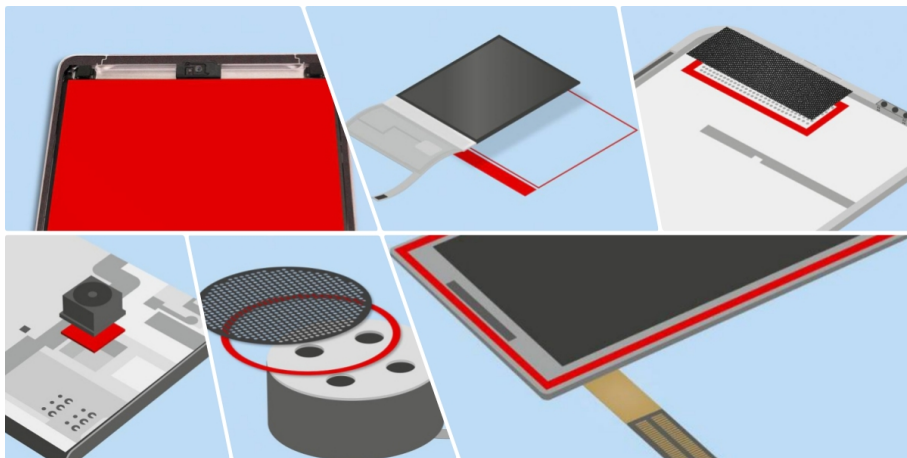

产品结构 Product Structure

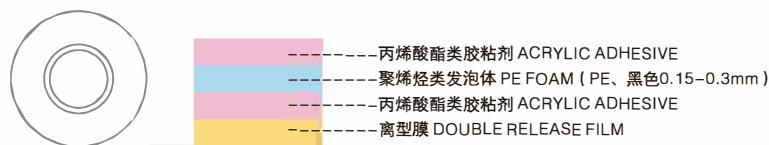

型号 Item	厚度 Thicknss (mm)	颜色 Color	180°剥离力 180°Peeling force (N/in)	耐温 Tem.resistance(°C)	规格 Size
5215B	0.15	黑Black	≥15	-20~80	940mm*50M
5220B	0.20	黑Black	≥18	-20~80	940mm*50M
5225B	0.25	黑Black	≥18	-20~80	940mm*50M
5230B	0.30	黑Black	≥18	-20~80	940mm*50M

注：本资料所有数据均在奥米科标准条件下测试所得。所有数据并非保证值，仅供参考。1、胶带厚度中不包括剥离层的厚度。2、可以根据客户的要求个案生产。3、要达到最佳的粘接效果，粘接表面必须是洁净、干燥的，胶带应用的最佳温度范围是21-38℃，建议若初始粘接温度低于10℃时，不适宜粘接，因此时的胶粘剂可能会变硬，而无法牢固粘接在物体上；但是，如果已经粘接上了，低温下的持粘力同样是令人满意的。

Note: The data sheet is obtained under the AMK lab standard test for reference. 1.The thickness excludes the released liner thickness. 2.Manufacturing can be customized. 3.Before laminating, all foreign materials such as dirt, water and oil should be cleaned and dried. Or you may get unexpected results different from this data sheet. To obtain optimum adhesion, the bonding surfaces must be clean, dry and well unified. Some typical surface cleaning solvents are isopropyl alcohol or heptane.* Ideal tape application temperature range is 21°C to 38°C. Initial tape application to surfaces at temperatures below 10°C is not recommended because the adhesive becomes too firm to adhere readily. However, once properly applied, low temperature holding is generally satisfactory.