

防水泡棉胶带

WATERPROOF FOAM TAPE

性能特点 Features


- ▶ 优异的抗跌落、缓冲性，采用高强度闭孔泡棉设计，通过泡棉的应力缓和达到冲击吸收效果，重工性优；
- ▶ 密封性和防水性优，能防止灰尘和水汽进入，耐候性、耐溶剂性优。
- ▶ Excellent anti-drop, cushioning, used high-strength closed-cell foam design, impact absorption effect,excellent overhauling;
- ▶ Has excellent sealing and water resistance, prevent dust and water vapor from entering, has excellent weather resistance and solvent resistance.

推荐应用 Application recommend

- ▶ 手机框体、车载显示屏框体粘接固定；
- ▶ 电子产品零部件边框粘接，具有优良的密封性和防水性能。
- ▶ Suitable for bonding and fixing of mobile phone frame and car display frame;
- ▶ The frame bonding of electronic product parts with excellent sealing and waterproof performance.



产品结构 Product Structure

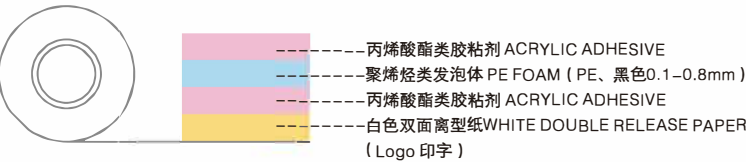

型号 Item	厚度 Thicknss (mm)	颜色 Color	180°剥离力 180°Peeling force (N/in)	耐温 Tem.resistance(°C)	规格 Size
5515S/B	0.15	灰/黑Gray/Black	≥16	-20 ~ 80	1030mm*50M
5520S/B	0.2	灰/黑Gray/Black	≥20	-20 ~ 80	1030mm*50M
5525S/B	0.25	灰/黑Gray/Black	≥20	-20 ~ 80	1030mm*50M
5530S/B	0.3	灰/黑Gray/Black	≥20	-20 ~ 80	1030mm*50M
5540S/B	0.4	灰/黑Gray/Black	≥20	-20 ~ 80	1030mm*50M
5550B	0.5	黑Black	≥20	-20 ~ 80	1030mm*50M
5560B	0.6	黑Black	≥20	-20 ~ 80	1030mm*50M
5580B	0.8	黑Black	≥20	-20 ~ 80	1030mm*50M
5110LK/WB	0.1	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5115LK/WB	0.15	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5120LK/WB	0.2	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5125LK/WB	0.25	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5130LK/WB	0.3	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5140LK/WB	0.4	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m
5150LK/WB	0.5	灰/黑Gray/Black	≥20	-20 ~ 80	1000mm*50m

"S"代表灰色，"B"代表黑色。 "S" stands for gray and "B" stands for black.
注：本资料所有数据均在奥米科标准条件下测试所得。所有数据并非保证值，仅供参考。
Note: The data sheet is obtained under the AMK lab standard test for reference.